




(WPOS-TAB FP)

WISEASY T1 FP

Android EMV Tablet with Fingerprint Function Stand

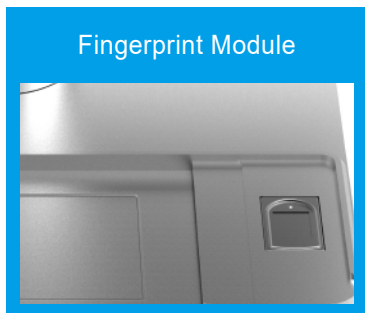

Cashier Box1



Magnetic Dock Stand

Beijing Wiseasy Technology Co.,Ltd.

ADD: 7th Floor, Block B, Wangxin Mansion, No.28 Xiaoyun Road, Chaoyang District, 100027, Beijing, China.
EMAIL: mk@wiseasy.com WEB: www.wiseasy.com

Follow us on:



Unique Features

- Large screen
- Rotating bracket
- Multiple extendable interfaces



Global industrial design award
—2017 Germany iF award product

WISEASY T1 Specifications

Item	Description
OS	Android 10.1, WiseOS
CPU	Qualcomm Octa-Core 1.8GHz
Memory	2+16GB standard, 4+64GB optional
Screen	11.6inches, resolution 1920x1080
Touch screen	5 points touch screen
Network	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B20/B28 LTE TDD: B38/B39/B40/B41 WCDMA: B1/B2/B4/B5/B8 GSM: 850/900/1800/1900MHz Optional: North America Version
WIFI	2.4G/5G, 802.11 a/b/g/n/AC
Bluetooth	Support 4.2+BLE
GPS	GPS/AGPS/GLONASS/Beidou
Camera	Front camera: 5Mega Rear camera: 8Mega, Pixel Auto Focus Support Flash light
Speaker	Single speaker, 1.2w
Microphone	Support
Earphone	3.5mm
Card slot	1 * Micro SIM + 1* Micro PSAM or 2 * SIM, support DSDS (SAM slot support the SIM Card function)
Button	Physical Button: Power Button, Sound Volume Buttons Touch Key: HOME Key

Item	Description	
Battery	3.7V/6450mAh, support fast charging	
Printer	Bluetooth and USB Printer	
NFC	13.56MHz, Support EMV2.6b standard ISO/IEC 14443, ISO18092, Type A&B, Felica, Mifare	
Magnetic Card Reader	ISO7810/7811, Support three-track two-way manual swinging	
IC Card Reader	1.ISO7816 2.PBOC3.0 L1/L2	
PINs	14PINs, D-/D+, VBUS, ID, UART, GPIO, 5V Out	
USB	TypeC USB2.0, High Speed, OTG.	
Dock Stand	Fingerprint	Optional
	RJ45	Support RJ45, WLAN internet
	USB	3*Type A USB ports
	Wire Charger	DC interface, 9V/2A
	Standing Charger	Magnetic suction connection charging
Weight	T1: 1040g Bracket: 1200g	
Dimensions	T1: L*W*H= 287.3 * 180.9 * 18.7 mm Bracket: L*W*H = 239.5 * 219.5 * 195.6 mm	
Temperature	Storage temperature: -35°C to 70°C Operating temperature: -10°C to 55°C Humidity: ≤95%	
Certifications	EMV Contact L1 / EMV Contactless L1 2.6b / EMV Contact L2 / VISA / MASTERCARD / AMEX / DISCOVER / PCI / TQM GSM / EU CE / India BIS / Brazil Anatel / Mexico NOM / China CCC / SRC	

Portable Printer Specifications

Items	Specification
Printing Method	Thermal Line Printing
Print Density	384mm/s
Print Speed	MAX 80mm/s
Paper Size	58x40mm
Print Command	ESC/POS
Interface	RS-232/USB/Bluetooth

Items	Specification
Roll Diameter	≤40mm
Print Content	Western Font: ASCII/Codepage/ customized character(12*24/9*17 dots); one - dimensional bar code: UPCA/UPCE/EAN13/EAN8/CODE39/ ITF25/CODABAR/CODE93/CODE128; two - dimensional bar code: PDF417/QR CODE/DATA Matrix;

Items	Specification
Working Environment	temperature:0°C~50°C; humidity:10%~80%
Storage Environment	temperature:-40°C~70°C; humidity:10%~95%
Lithium Battery	7.4V/2000mAh
Power	DC 12V, 2A
Size	108(L)*78(W)*45(H)mm
Weight	150g (no print paper and battery)

Fingerprint Module Specifications

Items	Specification
Capture Mode	Capacitive Touch
Fingerprint Image Size	256x288 pixel
Image Resolution	500 dpi

Items	Specification
Temperature	-10~55°C
Humidity	20-90% R.H
ESD	Contact: ± 6KV Air: ± 8KV